


CUS-LGS-VER1.0

- Real-Time LPG Detection
- Wireless Connectivity
- Instant Alerts & Notifications
- Loud Local Alarm
- Threshold & Sensitivity Settings
- Battery-Powered / Backup Options
- Integration With Security Systems
- Environmental Durability
- False Alarm Reduction
- Tamper Detection
- Status Indicators
- Easy Installation & Placement
- Compliance & Safety Certifications
- Where It's Most Useful

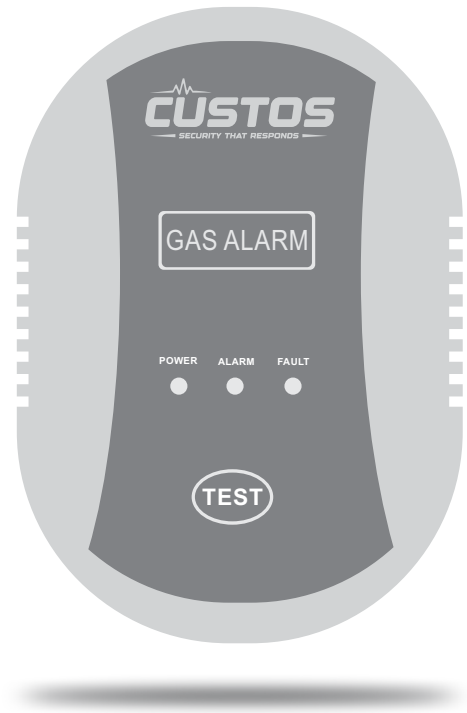

Technical Specification

MODEL	CUS-LGS-VER1.0
Remote alerts	Via smartphone app for Wi-Fi models
Sound alarm	Typically ≥ 70 –85 dB buzzer
Visual	LED flashing
Power	5v DC
Warm-up time	~1–3 minutes
Working Current	<450mA
Wireless frequency	433MHz
Mounting	Wall-mounted near kitchen ceilings or gas pipelines.
Working temperature	-10°C to +50°C
Humidity	Up to ~95% RH
Range	Wireless communication typically 30–100 m in open area (RF models).

*Product casing and specifications are subject to change without prior notice..

